

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number
WO 2004/010452 A2

(51) International Patent Classification⁷: **H01J 9/00**

(74) Agents: PECHMAN, Robert, J. et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(21) International Application Number:
PCT/US2003/019495

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 20 June 2003 (20.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002-208326 17 July 2002 (17.07.2002) JP

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

Published:


— without international search report and to be republished upon receipt of that report

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): YOKOYAMA, Chikafumi [JP/JP]; 6-5-30, Minami-Kurihara, Zama, Kanagawa 225-0015 (JP). KAWAI, Takayuki [JP/JP]; A102 Kamitsuruma 1837, Sagami-hara, Kanagawa 228-0208 (JP).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FLEXIBLE MOLD AND METHOD OF MANUFACTURING MICROSTRUCTURE USING SAME

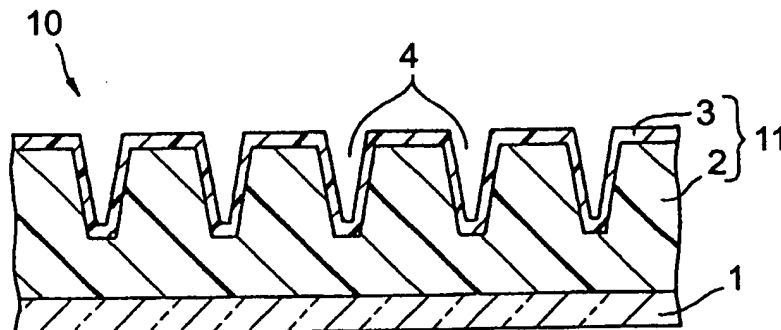

(57) Abstract: To provide a flexible mold capable of easily and correctly manufacturing protuberances such as PDP ribs at predetermined positions with high dimensional accuracy. A flexible mold comprises a support made of a material having a tensile strength of at least 5 kg/mm² and containing a moisture to saturation at a temperature and a relative humidity at the time of use by moisture absorption treatment applied in advance, and a molding layer having a groove pattern having a predetermined shape and a predetermined size on its surface.

WO 2004/010452 A2